版本	设计变更	日期	会签
R0	新品打样	2023.6.26	YYK

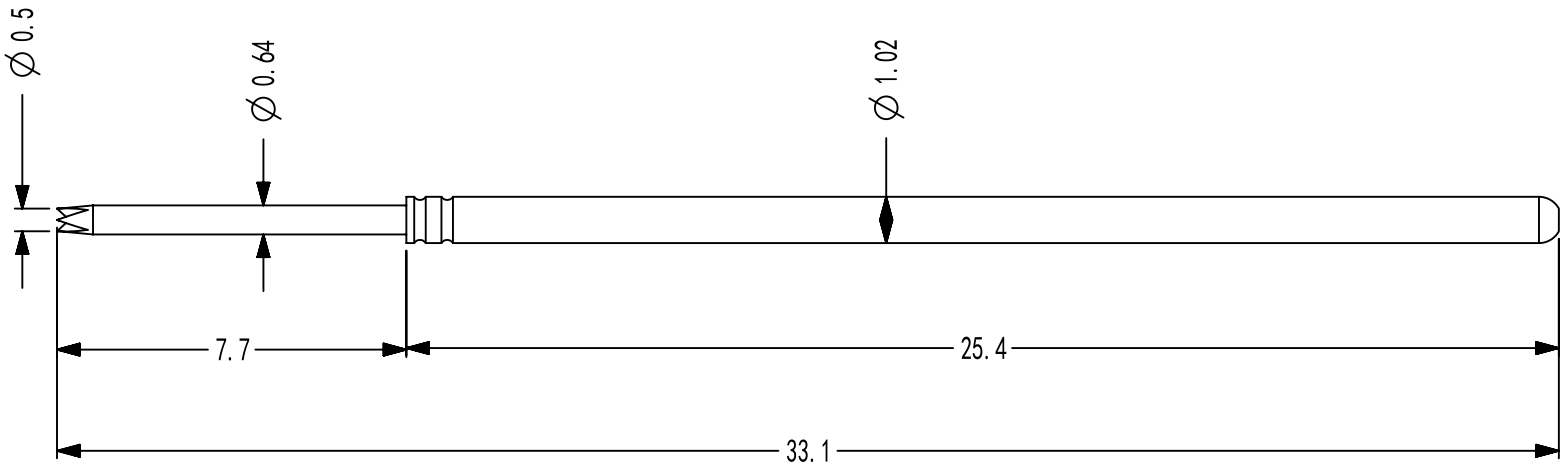

General data	
Pitch	>1.91mm
Temperature	-45° C to +80° C
Contacting from	Pad, pin, posts
Mechanical specifications	
Plunger	SK4- Au plated
Barrel	Phosphor - Au plated
Spring	Music wire - Au plated
Nominal travel	4.2mm
Maximum travel	6.35mm
Spring force	100g±20%@4.2mm
Pointing accuracy	±0.08mm
Mechanical life	100k cycles
Electrical specifications	
Continuous current	3A
Contact resistance	MAX.100mΩ

Drawn	YYK	2024.6.21	Scale	5:1	Series: RC075
Checked	YYK	2024.6.21	Sheet	1 of 1	Group: ICT Probe
Approved	ERIC	2024.6.21	Unit	mm	Title: RC075H050S200L3310
Size	A4	REV. R0	Note:		上海里库电子科技有限公司

Tolerances Unless Otherwise Specified:
0 PLC ±0.15 1 PLC ± 0.10
2 PLC ±0.05 3 PLC ± 0.01

THIS DRAWING IS A CONTROLLED DOCUMENT.