

A

B


C

D

E

F

版本	设计变更	日期	会签
A	新品打样	2025. 5. 21	YYK

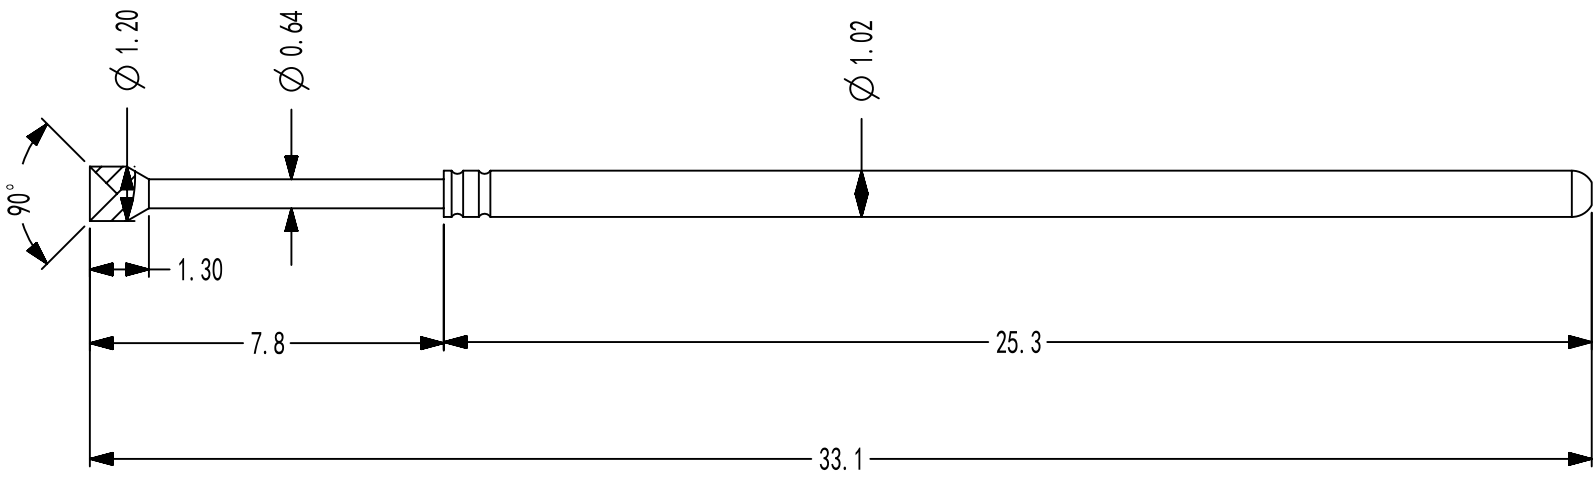

General data	
Pitch	1.27mm
Temperature	-45° C to +80° C
Contacting from	Pin, posts
Mechanical specifications	
Plunger	BeCu- Au plated
Barrel	Phosphor - Au plated
Spring	Music wire - Au plated
Nominal travel	4.3mm
Maximum travel	6.35mm
Spring force	200g±20%@4.3mm
Pointing accuracy	±0.08mm
Mechanical life	100k cycles
Electrical specifications	
Continuous current	3A
Contact resistance	MAX. 100mΩ

Drawn	YYK	2025. 5. 21		Scale	6:1	Series: RC075	Group:	ICT Probe
Checked	YYK	2025. 5. 21		Sheet	1 of 1	Title: RC075E120B200L3310		
Approved	ERIC	2025. 5. 21		Unit	mm			
Size	A4	REV.	A	Note:		 上海里库电子科技有限公司		
	Tolerances Unless Otherwise Specified: 0 PLC ±0.15 1 PLC ± 0.10 2 PLC ±0.05 3 PLC ± 0.01							
						THIS DRAWING IS A CONTROLLED DOCUMENT.		

A

B

C

D

E

F