
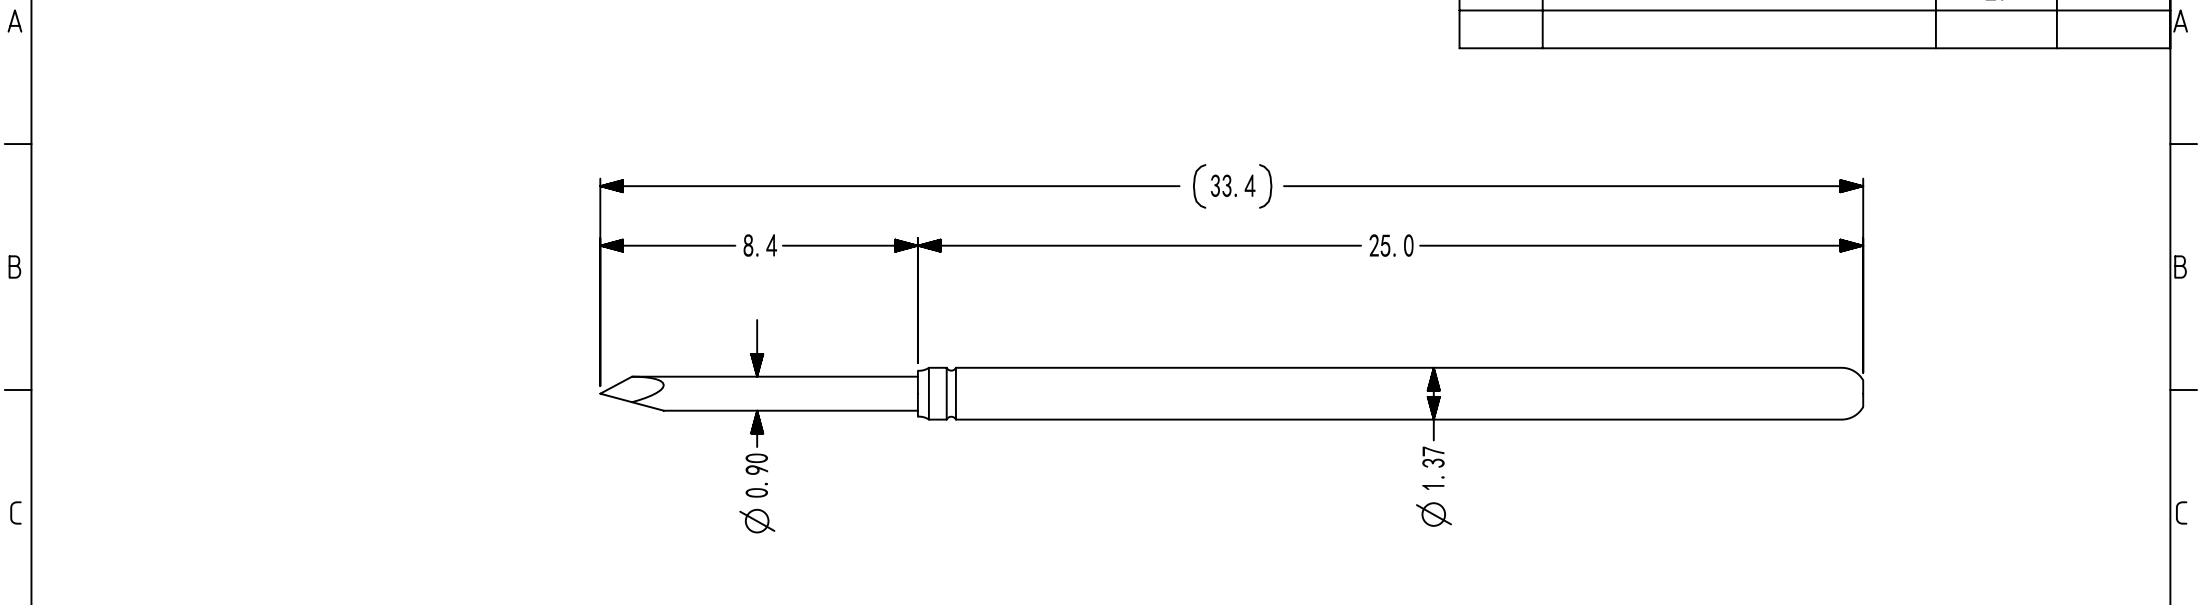




D	General data	
	Pitch	≥1.27mm
	Temperature	-45° C to +80° C
	Contacting from	Pad, via
E	Mechanical specifications	
	Plunger	SK4- Au plated
	Barrel	Phosphor - Au plated
	Spring	Music wire - Au plated
	Nominal travel	4.3mm
	Maximum travel	6.35mm
	Spring force	200g±20%@4.3mm
	Pointing accuracy	±0.08mm
F	Mechanical life	100k cycles
	Electrical specifications	
	Continuous current	3A
	Contact resistance	MAX. 100mΩ

Drawn	YYK	2023. 10. 27	Scale	5:1	Series:	Group: ICT/FCT Probe
Checked	YYK	2023. 10. 27	Sheet	1 of 1	Title: RC100A090S100GL3340	
Approved	ERIC	2023. 10. 27	Unit	mm		
Size	A4	REV.	A	Note:	 上海里库电子科技有限公司	
						
Tolerances Unless Otherwise Specified:				THIS DRAWING IS A CONTROLLED DOCUMENT.		
0 PLC ±0.15 1 PLC ± 0.10 2 PLC ±0.05 3 PLC ± 0.01						