
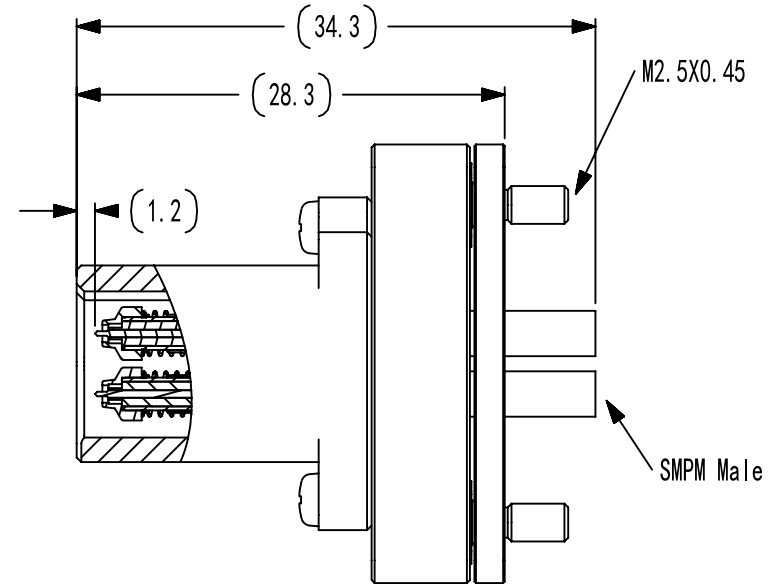
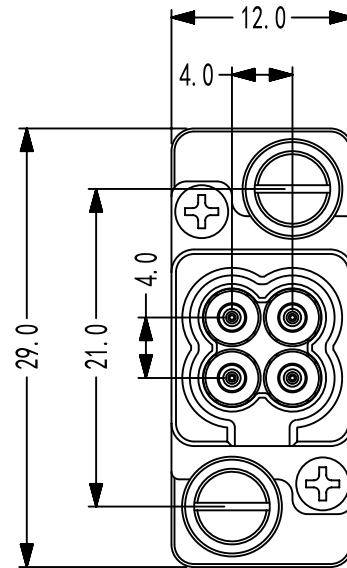


版本	设计变更	日期	会签
A	新品打样	2025. 3. 11	YYK




ELECTRICAL PERFORMANCES

IMPEDANCE	50 Ohm
FREQUENCY RANGE	DC TO 6GHz
V.S.W.R	1.80max(DC-6GHz)
INSULATION RESISTANCE	5000 Mohm
WITHSTANDING VOLTAGE	500 VDC

MECHANICAL PERFORMANCES

RF Probe	RK-500HFM1F-6G
FULL TRAVEL	1.5mm@INNER,4.0mm@OUTER
RECOMMENDED TRAVEL	1.0mm@INNER,3.2mm@OUTER
SPRING FORCE	100g@INNER,>400g@OUTER
D.U.T	Fakra mini female 4p
TEST LIFE	10000 TIMES(PIN CHANGEABLE)
TEMPERATURE	-55°C~+85°C

Drawn	YYK	2025. 3. 11	Scale	5:1	Series:	Group: Test Skocket
Checked	YYK	2025. 3. 11	Sheet	1 of 1	Title: RRM-RMFF1201-4P	
Approved	ERIC	2025. 3. 11	Unit	mm		
Size	A4	REV.	A	Note:		 上海里库电子科技有限公司
	Tolerances Unless Otherwise Specified: 0 PLC ± 0.15 1 PLC ± 0.10 2 PLC ± 0.05 3 PLC ± 0.01				THIS DRAWING IS A CONTROLLED DOCUMENT.	